

## TECHNICAL DATA

# ACTIFLEX

### STADIUM

Building height: 29mm

Board: 14 x 215 x 2200mm

Format: 3-Strip

Maximum floor size: 600m<sup>2</sup>

CE



LOW FLOOR  
ELEVATION



ADDITIONAL  
COLOUR  
CHOICE





QUICK AND EASY



NO TOOLS  
REQUIRED

STUDIO  
& GYM


HOTEL &  
HEALTH

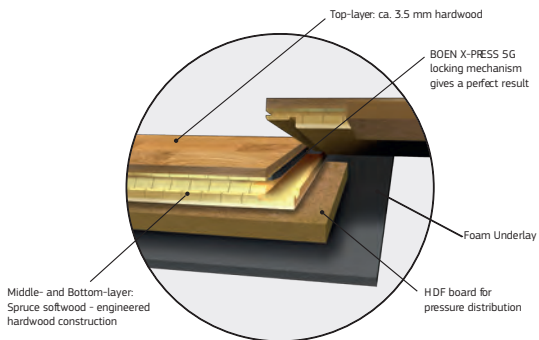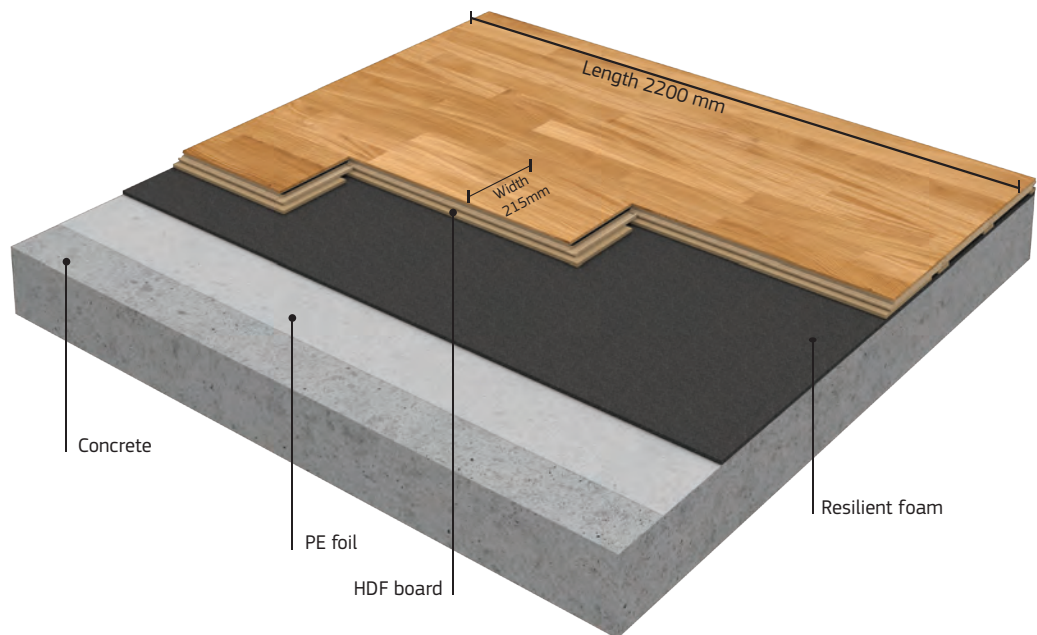

PERFORMANCE ACCORDING TO EN14904	SHOCK ABSORPTION		DEFORMATION		FRICTION	BALL BOUNCE	ROLLING LOAD
	TYPE 3: ≥ 40% ≤ 55%	TYPE 4: ≥ 55% ≤ 75%	TYPE 3: ≥ 1.8mm ≤ 3.5mm	TYPE 4: ≥ 2.3mm ≤ 5.0mm			
<b>Actiflex</b>	STADIUM	61%	3.8mm	86	95%	OK	



3-strip



Clic

## Wood species / Grading


## Package overview



Ash Sport \*



Beech Sport \*



Maple Can. Sport \*



Oak Sport \*

\* FSC™ Mix 70%

Pack Size: 4 boards =  
1.89m<sup>2</sup> (19.2kg)

Pallet Size: 40 bundles =  
75.6m<sup>2</sup> (766.80kg)

## Actiflex Stadium Construction Details (from the top to the edge of concrete/subfloor)

## Height

<b>Actiflex Stadium</b> • Hardwood Top-Layer 3.5mm • Middle layer and bottom layer spruce. • HDF board glued to bottom	Actiflex size: 21 x 215 x 2200mm  Actiflex Stadium Board 14 x 215 x 2200mm + HDF board 7mm	21mm
<b>Resilient foam</b>	8 x 1500 x 2000mm	8mm
<b>Perimeter Strips</b>	15 x 100 x 2500mm	✓
<b>PE Foil</b> (ordered separately)	Special requirement for new buildings: 2 layers of 0.2mm. It is not a moisture barrier, but gives to the floor an extra protection.	0.4mm
<b>Construction height</b>		29mm

### Maintenance

We recommend starting a regular system of maintenance from day one. The amount of maintenance your floor requires will depend on how you use and treat it. For more information: [boensport.com](http://boensport.com)

### The environment is at the core of all we do

BOEN hardwood flooring is a product of nature. As a procurer of timber BOEN has an important heritage to maintain. Constant involvement in resource preservation methods, participation in reforestation programmes and the development of alternatives to exotic species shows Boen's dedication towards the environment.

All timber purchased by BOEN is supplied from sources who belong to one or more forestry schemes or are working towards certification.

BOEN Bruk (Norway) FSC™ C051117, BOEN Parkett Deutschland (Germany) FSC™ C101713, BOEN Lietuva (Lithuania) FSC™ C021510, BOEN UK FSC™ C047288, BOEN US FSC™ C095158. [www.fsc.org](http://www.fsc.org), FSC – The mark of responsible forestry.

